
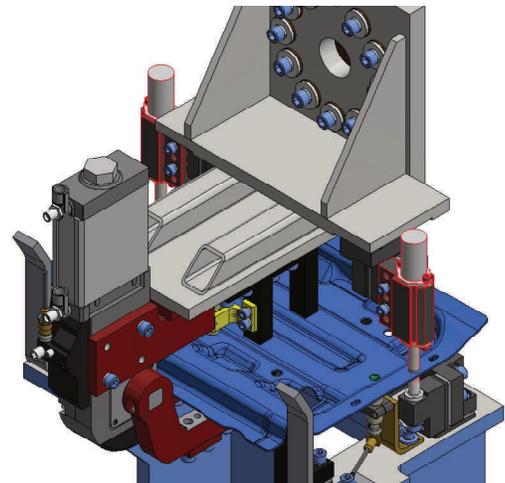
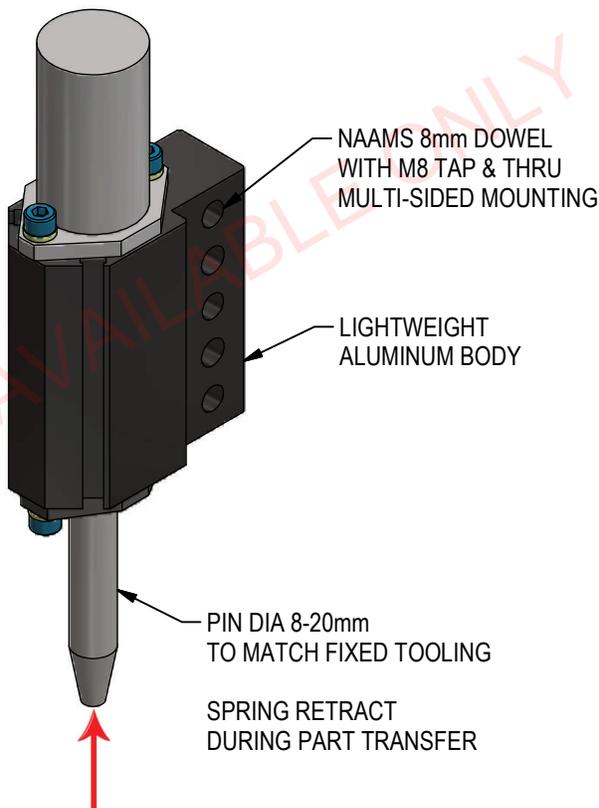


TMP TRANSFER PIN

- 8 - 20mm PIN DIAMETERS
- ROUND PIN ONLY, NO ANTI-ROTATE
- 50mm STROKE, SPRING LOADED

CONCAVE PIN TIP MEETS THE FIXTURE'S LOCATING PIN AND MAINTAINS SPRING FORCE CONTACT, WHILE PART IS TRANSFERED.

PIN-TO-PIN TRANSFER ALLOWS USE OF THE SAME HOLES IN PARTS WITHOUT USING NONTOLERANCE HOLES.

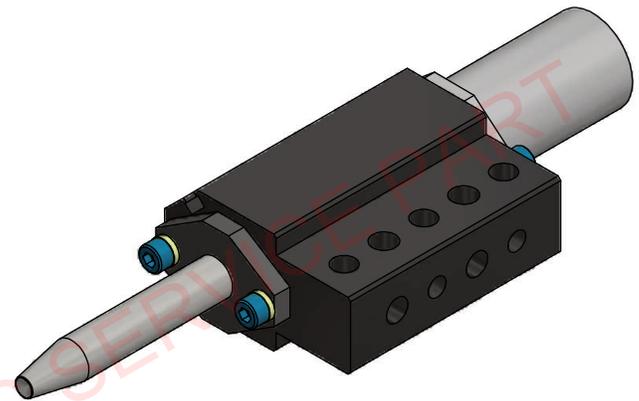

APPLICATIONS:

END OF ARM TOOLING
PASS TABLE
LOAD TABLE
MATERIAL HANDLING
PASS-OFF APPLICATION

RELEASED 2/8/22

